



ENVIRONMENTAL PRODUCT DECLARATION

In accordance with EN 15804:2012+A2:2019 and ISO 14025

MARIS Water-based products



Date of issue: 2023-01-11

Validity: 5 years

Valid until: 2028-01-10

Version: 1

Scope of the EPD®: Global

The **environmental impacts** of this product have been assessed over its **whole life cycle**. Its Environmental Product Declaration has been verified by an **independent third party**.

Registration number
The International EPD® System:
S-P-07980

General information

Manufacturer: MARIS POLYMERS S.M.S.A.

Programme used: International EPD System <http://www.environdec.com/>

EPD registration number: S-P-07980.

PCR identification: PCR 2019:14 Construction products version 1.11.

Site of manufacture: Thesi Roumani Inofyta Viotia, 32011, Greece.

Owner of the declaration: MARIS POLYMERS S.M.S.A.

Product / product family name and manufacturer represented: Maris Water-based products manufactured by Maris Saint-Gobain: MARISEAL® 250W, MARISEAL® 270W, MARISEAL® 280W, MARISEAL® 281W, MARISEAL® 282W, MARISEAL® 400W, MARISEAL® 710W, MARISEAL® AQUA PRIMER and MARISEAL® 800 PLUS.

UN CPC code: 35110 - Paints and varnishes and related products.

EPD Prepared by: LCA Central Team, Saint-Gobain.

Contact: Loukia Bousia (Loukia.Bousia@saint-gobain.com).

Declaration issued: 2023/01/11, valid until: 2028/01/10.

Declared Unit: 1 kg of product installed and with a service life between 10 and 25 years (see details in the table: Product description and use, for each product).

All inventory data, as well as all indicator results expressed in this report, are declared for 1 kg of materials. Additionally, **as additional information**, based on the standard product application, the equivalent results from the LCA study may be applicable to:

Table 1. Consumption scenarios

Average consumption	Minimum consumption	Maximum consumption
kg/m2	kg/m2	kg/m2
1.50E-01	1.48E+00	2.80E+00

*see details in the table: Product description and use, for each product.

Declaration of Hazardous substances: during the life cycle of the product any hazardous substance listed in the "Candidate List of Substances of Very High Concern (SVHC) for authorization" has been used in a percentage higher than 0.1% of the weight of the product.

Geographical scope of the EPD®: Global.

The intended use of this EPD is for B2B communication.

Demonstration of verification: an independent verification of the declaration was made, according to ISO 14025:2010. This verification was external and conducted by the following third party based on the PCR mentioned above.

ISO standard ISO 21930 and CEN standard EN 15804 serves as the core Product Category Rules (PCR)

EPD program operator	The international EPD® System
Address:	EPD® International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com
Product Category Rules (PCR)	PCR 2019:14 Construction products (version 1.11).
PCR review was conducted by	The Technical Committee of the International EPD® System. See www.environdec.com/TC for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact .

Independent third-party verification of the declaration and data, according to ISO 14025:2006:

External Internal
 EPD process certification EPD verification

Third party verifier: Marcel Gómez
 Marcel Gómez Consultoría Ambiental, Tlf: 0034 630 64 35 93 - email: info@marcelgomez.com
 Approved by: The International EPD® System

Procedure for follow-up of data during EPD validity involves third part verifier:

Yes No

Product description

Product's name:

Maris Water-based products. See the exact list of the products included just below.

See technical characteristics of the products at: <https://www.marispolymers.com> and [chrome-extension://efaidnbnmnibpcjpcglclefindmkaj/https://www.marispolymers.com/wp-content/uploads/2021/07/catalogue-2020-gr-en.pdf](https://www.marispolymers.com/wp-content/uploads/2021/07/catalogue-2020-gr-en.pdf)

Product description and use:

Product name	Technical description	Product description
MARISEAL® 250W	Liquid-applied, Pure Polyurethane Waterproofing Membrane Water-based	Liquid-applied, highly permanent elastic, water-based polyurethane membrane used for long-lasting waterproofing of roofs, terraces, and balconies. Consists of flexible, water-based polyurethane resins (dispersion). Based on the innovative PUD-Technology™ of Maris. Certified for 25 years expected life span (EOTA) & EN 1504-2 Consumption: 1.4 – 2.8 kg/m ² applied in two or three layers.

MARISEAL® 270W	Liquid-applied, Modified Polyurethane Water-based Membrane / Waterproofing of Wet-Areas		Liquid-applied, highly permanent elastic, cold applied and cold curing, modified, water-based, polyurethane membrane, used for long-lasting waterproofing on under-tile applications of wet areas. Consists of flexible, water-dispersed modified polyurethane resins, with high permanent elongation. EN 14891 Consumption: 1.8 kg/m ² applied in more than two layers.
MARISEAL® 280W	Liquid-applied polyurethane waterproofing membrane	hybrid	Liquid-applied, highly permanent elastic, cold applied and cold curing, water based, one component, modified polyurethane membrane used for long-lasting waterproofing of roofs. Based on the innovative PUD-Technology™ of Maris. EN 1504-2 Consumption: 1.0 – 1.5 kg/m ² applied in two or three layers.
MARISEAL® 281W	Liquid-applied polyurethane waterproofing membrane Based	hybrid Water	Liquid-applied, highly permanent elastic, cold applied and cold curing, water based, hybrid polyurethane membrane, used for long-lasting waterproofing of roofs. Based on the innovative PUD-Technology™ of Maris. EN 1504-2 Consumption: 1.0 – 1.5 kg/m ² applied in two or three layers.
MARISEAL® 282W	Liquid-applied polyurethane waterproofing membrane	hybrid	Liquid-applied, highly permanent elastic, cold applied and cold curing, water based, one component, modified polyurethane membrane used for long-lasting waterproofing of roofs Based on the innovative PUD-Technology™ of Maris. EN 1504-2 Consumption: 1.0 – 1.5 kg/m ² applied in more than two layers.
MARISEAL® 400W	Aliphatic Polyurethane Top-Coat, UV-stable, Water-based Light Pedestrian Traffic Areas		Water-based, pigmented, wear resistant, semi-rigid, UV & colour stable, polyurethane coating used as a top-coat for protection over water-based waterproofing membranes. Certified for 25 years expected life span (EOTA), EN 1504-2 & EN 13813 Consumption: 0.20 – 0.40 kg/m ² applied in one or two layers.
MARISEAL® 710W	Polyurethane Water-based	Primer,	Water-based, transparent, semi-rigid, deep penetrating, quick drying polyurethane primer. Based on the innovative PUD-Technology™ of Maris. EN 1504-2 Consumption: 0.20 kg/m ² applied in one or two layers.
MARISEAL® AQUA PRIMER	Epoxy Primer, Water-based.		Transparent, rigid, epoxy primer. Used as a primer in waterproofing, sealing and floor coating applications on non-absorbent surfaces. Cures by reaction (cross linking) of the two components. Certified for 25 years expected life span (EOTA) & EN 1504-2 Consumption: 0.10 – 0.20 kg/m ² applied in one or two layers.
MARISEAL® 800 PLUS	Siloxane / Silane Water and Oil Repellent		Is a transparent, deep penetrating, non-staining, non-yellowing, non-film-making, siloxane/silane nanotechnology-based water repellent, used on facades and walls. It will prevent water penetration and protect surface from ultraviolet degradation, airborne dirt, smog, industrial fumes, acid rain, chloride ions and will stabilize the surface. EN 1504-2 Consumption: 0.30 kg/m ² applied in one layer (flood coat).

MARISEAL® 250W

Technical data*

PROPERTY	RESULTS	TEST METHOD
Tensile Strength at 20°C	>4,5 N/ mm ²	ASTM D 412
Elongation at Break at 20°C	>300%	ASTM D 412
Resistance to Water Pressure	No Leak (1m water column, 24h)	DIN EN 1928
Adhesion to primed concrete	>1,5 N/mm ² (concrete surface failure)	EN 1542
Hardness (Shore A Scale)	>65	ASTM D 2240 (15")
Permeability to CO ₂ (measured in CE system)	4.55g/m ² d	EN 1062-6
Water vapour permeability (measured in CE system)	18.5g/m ² d	EN ISO 7783
Capillary absorption and permeability to water (measured in CE system)	0.025 kg/m ² .h ^{0.5}	EN 1062-3
Adhesion strength by pull-off test (measured in CE system)	1.5 N/mm ²	EN 1542
Light Pedestrian Traffic Time	18-24 hours	Conditions: 20°C, 50% RH
Final Curing time (ponding test)	10 days	

MARISEAL® 270W

Technical data

PROPERTY	RESULTS	TEST METHOD
Elongation at Break	350 %	ASTM D 412
Tensile Strength	>2,5 N/ mm ²	ASTM D 412
Thermal Resistance (80°C for 100 days)	Passed - No significant changes	EOTA TR-011
Resistance to Water Pressure	No Leak (1m water column, 24h)	DIN EN 1928
Adhesion to concrete	1.60 N/mm ²	EN 14891
Crack bridging (23°C)	3,7 mm	EN 14891
Service Temperature	-20°C to +70°C	Inhouse Lab
Tack Free Time	6 hours	Conditions: 20°C, 50% RH
Final Curing time	7 days	

MARISEAL® 280W

Technical data*

PROPERTY	RESULTS	TEST METHOD
Elongation at Break	200 %	ASTM D 412
Tensile Strength	>1,5 N/ mm ²	ASTM D 412
Resistance to Water Pressure	No Leak (1m water column, 24h)	DIN EN 1928
Adhesion to concrete	>1,2 N/mm ²	EN 1542
Permeability to CO ₂ (measured in CE system)	1.9 g/m ² d	EN 1062-6
Water vapour permeability (measured in CE system)	7.5 g/m ² d	EN ISO 7783
Capillary absorption and permeability to water (measured in CE system)	0.012 kg/m ² .h ^{0.5}	EN 1062-3
Hardness (Shore A Scale)	60	ASTM D 2240 (15")
Tack Free Time	6 hours	Conditions: 20°C, 50% RH
Light Pedestrian Traffic Time	18 hours	
Final Curing time	7 days	

MARISEAL® 281W

Technical data*

PROPERTY	RESULTS	TEST METHOD
Elongation at Break	100 %	ASTM D 412
Tensile Strength	>1,5 N/ mm ²	ASTM D 412
Resistance to Water Pressure	No Leak (1m water column, 24h)	DIN EN 1928
Adhesion to concrete	>1,2 N/mm ²	EN 1542
Permeability to CO ₂ (measured in CE system)	3.4 g/m ² d	EN 1062-6
Water vapour permeability (measured in CE system)	17.75 g/m ² d	EN ISO 7783
Capillary absorption and permeability to water (measured in CE system)	0.009 kg/m ² .h ^{0.5}	EN 1062-3
Hardness (Shore A Scale)	60	ASTM D 2240 (15")
Tack Free Time	6 hours	Conditions: 20°C, 50% RH
Light Pedestrian Traffic Time	18 hours	
Final Curing time	7 days	

MARISEAL® 282W

Technical data*

PROPERTY	RESULTS	TEST METHOD
Elongation at Break	200 %	ASTM D 412
Tensile Strength	>1,5 N/ mm ²	ASTM D 412
Resistance to Water Pressure	No Leak (1m water column, 24h)	DIN EN 1928
Adhesion to concrete	>1,2 N/mm ²	EN 1542
Permeability to CO ₂ (measured in CE system)	0.95 g/m ² d	EN 1062-6
Water vapour permeability (measured in CE system)	5.7 g/m ² d	EN ISO 7783
Capillary absorption and permeability to water (measured in CE system)	0.014 kg/m ² .h ^{0.5}	EN 1062-3
Hardness (Shore A Scale)	60	ASTM D 2240 (15")
Tack Free Time	6 hours	Conditions: 20°C, 50% RH
Light Pedestrian Traffic Time	18 hours	
Final Curing time	7 days	

MARISEAL® 400W

Technical data

PROPERTY	RESULTS	TEST METHOD
Elongation at Break at 20°C	250%	ASTM D 412
Tensile Strength at 20°C	>10 N/mm ²	ASTM D 412
UV Stability, 2000h	excellent	ASTM G154
Permeability to CO ₂ (measured in CE system)	4.55g/m ² d	EN 1062-6
Water vapour permeability (measured in CE system)	18.5g/m ² d	EN ISO 7783
Capillary absorption and permeability to water (measured in CE system)	0.025 kg/m ² .h ^{0.5}	EN 1062-3
Adhesion strength by pull-off test (measured in CE system)	1.5 N/mm ²	EN 1542
Impact Resistance	19.6Nm	EN ISO 6272-1
Wear Resistance	10µm	EN 13892-4
Solar Reflectance Index (SRI) (white colour)	113	ASTM E1980-01
Infrared emittance (white colour)	0.88	ASTM C1371-04a
Solar Reflectance (white colour)	89	ASTM E903-12
Resistance to Water Pressure	No Leak (1m water column, 24h)	DIN EN 1928
Hardness (Shore A Scale)	>65	ASTM D 2240 (15")
Rain Stability Time	4 hours	Conditions: 20°C, 50% RH
Light Pedestrian Traffic Time	18-24 hours	
Final Curing time (ponding test)	10 days	

MARISEAL® 710W

Technical data*

PROPERTY	RESULTS	TEST METHOD
Adhesion to concrete	>1,5 N/mm ²	EN 1542
Hardness (SHORE A Scale)	>80	ASTM D 2240
Resistance to Water Pressure	No Leak (1m water column, 24h)	DIN EN 1928
Service Temperature	-30°C to +90°C	Inhouse lab
Water Vapor Permeability	>15 gr/m ² /day	ISO 9932:91
Tack free time	90 min	Conditions: 20°C, 50% RH
Overcoating time	3-4 hours	
Final Curing time	10 days	

MARISEAL® AQUA PRIMER

Technical data*

PROPERTY	RESULTS	TEST METHOD
Composition	Epoxy resin + Hardener. Water based	
Mixing Ratio	A:B = 3:1	
Adhesion to aluminum	>2 N/mm ²	EN 1542
Adhesion to concrete	>4.5 N/mm ²	EN 1542
Hardness (SHORE A Scale)	>95	ASTM D 2240
Resistance to Water Pressure	No Leak (1m water column, 24h)	DIN EN 1928
Service Temperature	-30°C to +90°C	Inhouse lab
Application Temperature	10°C to 35°C	Conditions: 20°C, 50% RH
Pot Life	45-50 min	
Overcoating time	6-12 hours	
Final Curing time	7 days	

MARISEAL® 800 PLUS

Technical Data *

PROPERTY	RESULTS	TEST METHOD
Resistance to Water Pressure	No Leak (1m water column, 24h)	DIN 1928, Test A
Tack Free Time	1-2 hours	Conditions: 20°C, 50% RH
Light Pedestrian Traffic Time	12 hours	
Final Curing time	14 days	

Description of the main product components and/or materials:

Maris Water-based products can have a variable composition range. The composition range of the products is shown below. For its representation in the calculation model, an average product has been represented at the composition level, based on the contribution to the environmental impact of the different raw materials.

Product components	Weight (%)	Post-consumer material weight (%)	Renewable material weight (%)
Fillers	12 - 56	0 %	0 %
Acrylic	1 - 20	0 %	0 %
Water	23 - 45	0 %	0 %
PU	1 - 28	0%	0%
Additives	1 - 3	0 %	0 %
TOTAL	100	0%	0%

Packaging materials	Weight (Kg)	Weight-% (versus the product)
Plastic packaging	0.03 – 0.11	3.15%
Plastic wrap	0.001 – 0.002	0.16%
EURO Wood-pallet	0.002 – 0.003	0.23%

During the life cycle of the product any hazardous substance listed in the “Candidate List of Substances of Very High Concern (SVHC) for authorization” has not been used in a percentage higher than 0.1% of the weight of the product. The verifier and the program operator do not make any claim nor have any responsibility of the legality of the product.

LCA calculation information

EPD TYPE DECLARED	Cradle to grave and module D Product-specific (one manufacturing site)
DECLARED UNIT	1 kg of product installed and with a service life between 10 and 25 years
SYSTEM BOUNDARIES	Cradle to grave + Module D = (A + B + C) + D
REFERENCE SERVICE LIFE (RSL)	The RSL is considered to be between 10 and 25 years, due to its nature and composition, these materials are of high quality and proven durability.
CUT-OFF RULES	<p>In general, the cut-off criteria are 1% of the consumption of renewable and non-renewable primary energy and 1% of the total input mass of the manufacturing process (according to the EN 15804 standard). In the evaluation, all available data of the production process is considered, i.e., all raw materials used, auxiliary materials used and energy consumption using the best available data sets in the reference database. The following processes have been excluded:</p> <ul style="list-style-type: none"> • Manufacture of equipment used in production, infrastructure, or any other capital goods. • Transportation of personnel to the plant or from the production site. • Research and development activities. • Long-term emissions.
ALLOCATIONS	<p>In general, whenever possible, allocation was avoided. Materials production was divided into families, and input and output data related to each were collected, when the data could not be directly attributed to a specific product, they were generally assigned to the total production of materials without differentiation.</p> <p>The allocation of the consumption of common inputs such as water consumption, as well as common production outputs, such as solid waste generation, was made based on the total annual production of materials. The consumption reported for fuels and electricity was made at plant level, the allocation was assumed by total production (by mass). The modularity principle as well as the polluter-payer principle have been followed.</p> <p>The waste management data corresponds to all the waste generated in the facilities of the production plant, considering total generation of residues. Therefore, the reported data includes all the products made in the production plant.</p>
GEOGRAPHICAL COVERAGE AND TIME PERIOD	<p>Production site location: Greece. Use and end-of-life location: Global.</p> <p>Data is collected from one production site in Thesi Roumani Inofyta Viotia, 32011, Greece.</p> <p>Data collected for the year 2021.</p> <p>Background data: Ecoinvent 3.8 and SimaPro 9.3.</p>
PRODUCT UN CPC CODE	35110 - Paints and varnishes and related products.

According to EN 15804:2012+A2:2019, EPDs of construction products may not be comparable if they do not comply with this standard. According to ISO 21930, EPDs might not be comparable if they are from different programmes.

Life Cycle stages

Flow diagram of the Life Cycle



Product stage, A1-A3

Description of the stage: the product stage of plaster products is subdivided into 3 modules A1, A2 and A3 respectively “Raw material supply”, “transport to manufacturer” and “manufacturing”.

A1. Raw materials extraction

For each product, a model was made and then an average of the calculated models was calculated, per kilogram of product. Some products are the result of the combination of 2 or more components, some of them have component A and component B. In these cases, a weighted ratio of products A and B was calculated. The specific consumption per kg of product is calculated in kg/m².

For the quantification of impacts associated with raw materials, 100 % of the components reported in the production of materials have been used, including main and secondary raw materials.

A2. Transportation of raw materials

To determine the transport of raw materials, the data recorded by the production plant regarding their raw materials and data referring to their supply have been used. Additionally, the production plant has also reported the road transport distance for each of the secondary materials (consumables) used in the production activities during the year. Consumable materials include: fuels (diesel), oils and others. For each of them, the total quantity transported

and the weighted average distance according to the quantity registered by each production center have been determined to calculate the kg*kilometer ratio, which has been consolidated for each product family.

Greece production center of Maris has reported the average distance and means of transport used for the transportation of raw materials from their production site.

A3. Production (Manufacturing)

Based on the internal records of the production plant, the quantity of materials produced per year, by nature of the product, has been reported.

These products come from the combination of different polymers; some products are the result of more than 5 combined polymers.

The general manufacturing processes within the operational limits of MARIS Water-based products production are presented in the following figure and listed below:

- 1) Reception of the raw material
- 2) Quality control
- 3) Storage
- 4) Mix with resins and pigments
- 5) Mass distribution
- 6) Quality control

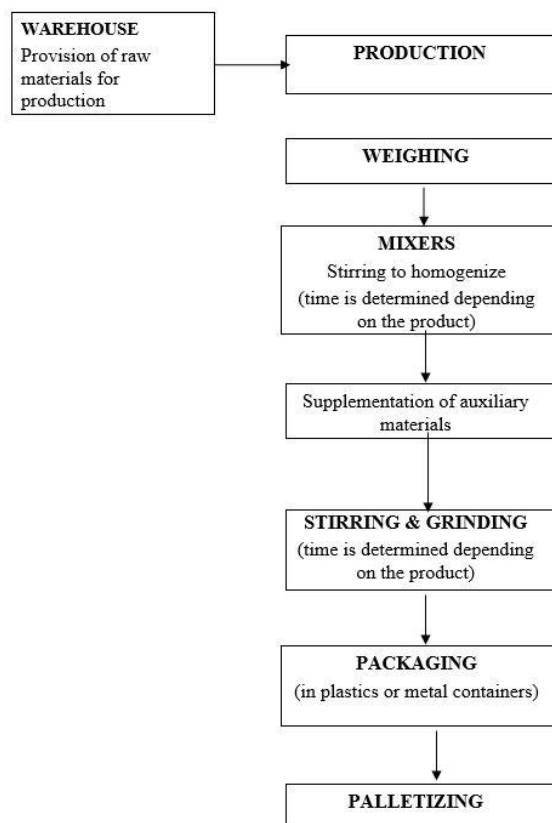


Figure 1. Manufacturing process for Maris products

The main inputs of the manufacturing system are:

- Energy: Electricity and Fuels.
- Water: Well intake or network consumption.
- Consumables: External raw materials, Waste to be processed and/or recovered.
- Transports: Packaging and waste.

The main outputs of the production system are:

- Waste generated: Hazardous, Non-hazardous.
- Emissions to air, water or soil (none).

Construction process stage, A4-A5

Description of the stage: the construction process is divided into 2 modules: A4, transport to the building site and A5, installation in the building

A4. Product transport

Considering the wide distribution of products at an international and regional level, based on the sales distribution report, the total production sold by family and by country of destination is reported. For each of the destinations, according to information for internal use, the export ports in the country of origin and import ports in the destination countries are determined. An average transportation distance to the construction site is determined in each destination country.

For each case, the transport distances are determined and associated with a mode of transport: land freight vehicle, and maritime container ship. The detail of the technical parameters for the transport model is obtained from the Ecoinvent 3.8 database and its reference technical studies. The assumptions of this modeling are summarized below.

PARAMETER	VALUE (expressed per declared unit)	
Type and fuel consumption of the vehicle, type of vehicles used for the transport; for example, trucks for long distance, boat, etc.	Transport, freight, lorry 16-32 metric ton, EURO6 {RER} transport, freight, lorry 16-32 metric ton, EURO6 Cut-off, U	Transport, freight, sea, container ship {GLO} transport, freight, sea, container ship Cut-off, U
Distance	Km by truck: 1140.94	Km by ship: 167.13
Capacity utilization (including empty return trip)	Percentage assumed by Ecoinvent data base	Percentage assumed by Ecoinvent data base
Apparent density	kg/m ³ : 0.8 – 1.43	
Volume capacity factor	1	1

A5. Construction-Installation process.

Considering the uses and installation, it can be reported that more than 99 % of the cases require a manual installation that does not imply the use of extra resources, neither energy, nor water nor application machines, only spreading on the surfaces where the product is applied and it remains. It is considered that it does not generate extra waste not previously considered, apart from that referring to the packaging in which the product is stored and the packaging in which it is transported from the country of origin to the destination.

There is an estimation of 0.3 % of material loss during the installation process. Regarding waste management, plastic waste (container pots), pallets, metal waste and mixed packaging are considered, which are assumed to be 100% recycled considering at an average distance scenario of 50 km.

Use stage, B1-B7

The use stage, related to the application of the product in the building includes:

- B1.** Use or application of the installed product;
- B2.** Maintenance;
- B3.** Repair;
- B4.** Replacement;
- B5.** Refurbishment;
- B6.** Operational energy use;
- B7.** Operational water use.

Description of scenarios and additional technical information:

Based on their design features and components, Maris products have a service life of between 10 and 25 years. Regardless of the installation conditions and multiple applications for final finishing, the maintenance needs are none. As a consequence, the impact of these stages is 0.

End-of-life stage C1-C4

This stage includes the next modules:

- C1.** Deconstruction, demolition;
- C2.** Transport to waste processing;
- C3.** Waste processing for reuse, recovery and/or recycling;
- C4.** Disposal-

Description of the scenarios and additional technical information for the end-of-life:

MODULE	PARAMETER	UNIT (PER DECLARED UNIT)	VALUE
C1 Deconstruction	Process of collection specified by type	Kg collected in a separate	0
		Kg collected mixed with waste from construction	1
C2 Transport	Type and fuel consumption of the vehicle, type of vehicles used for the transport	Transport, freight, lorry 16-32 metric ton, EURO6	Diesel consumption: 0.0366 tkm
	Distance	km	50
	Use of capacity (including empty returns)	%	Percentage assumed by Ecoinvent data base
	Apparent density of transported products	kg / m ³	800 – 1430
	Useful capacity factor		1
C3 Treatment of waste	System recovery specified by type	kg for reuse	0
		kg for recycle	0
C4 Disposal	Disposal specified by type	kg for energy recovery	0
		kg of product for final deposition	1

Reuse/recovery/recycling potential, D

100% of wastes are landfilled. There is no reuse nor recovery nor recycling of this product. Hence, no recycling benefits are reported on Module D.








LCA results

As specified in EN 15804:2012+A2:2019 and also the Product-Category Rules, the environmental impacts are declared and reported using the baseline characterization factors are from the ILCD. Specific data has been supplied by the plant, and generic data come from Ecoinvent v3.8 databases. All emissions to air, water, and soil, and all materials and energy used have been included.

System boundaries (X=included, MND=module not declared)																		
	PRODUCT STAGE			CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE			BENEFITS AND LOADS		
	Raw material supply	Transport	Manufacturing	Transport	Construction-Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-recovery	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
Modules declared	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Geography	GR	GR	GR	GLO	GL O	GL O	GL O	GL O	GLO	GL O	GLO	GLO	GLO	GL O	GLO	GL O	GLO	
Specific data used	>90 GWP-GHG																	
Variation products	<10% inside of every group of products																	
Variation sites	Not relevant, only one production site																	

Notes: All data results are representative for 1 kg of Maris Water-based products. The estimated impact results are only relative statements which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins or risks.

Environmental impacts - Group 1. MARISEAL® 250W, MARISEAL® 270W, MARISEAL® 280W and MARISEAL® Aqua Primer.

	Environmental indicators	Product stage	Construction stage		Use stage							End of life stage			Reuse, Recovery Recycling	
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / ...	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Climate Change [kg CO ₂ eq.]	2.29E+00	1.01E-01	7.33E-03	0	0	0	0	0	0	0	0	8.15E-03	0	5.35E-03	0
	Climate Change (fossil) [kg CO ₂ eq.]	2.32E+00	1.01E-01	7.43E-03	0	0	0	0	0	0	0	0	8.14E-03	0	5.27E-03	0
	Climate Change (biogenic) [kg CO ₂ eq.]	-3.59E-02	1.05E-04	-1.07E-04	0	0	0	0	0	0	0	0	7.42E-06	0	7.97E-05	0
	Climate Change (land use change) [kg CO ₂ eq.]	2.91E-03	3.84E-05	8.91E-06	0	0	0	0	0	0	0	0	3.26E-06	0	1.91E-06	0
	Ozone depletion [kg CFC-11 eq.]	1.58E-06	2.51E-08	4.86E-09	0	0	0	0	0	0	0	0	1.89E-09	0	9.36E-10	0
	Acidification terrestrial and freshwater [Mole of H ⁺ eq.]	1.24E-02	3.67E-04	3.84E-05	0	0	0	0	0	0	0	0	2.31E-05	0	4.91E-05	0
	Eutrophication freshwater [kg P eq.]	7.15E-05	7.14E-07	2.18E-07	0	0	0	0	0	0	0	0	5.81E-08	0	6.33E-08	0
	Eutrophication marine [kg N eq.]	2.44E-03	8.21E-05	7.59E-06	0	0	0	0	0	0	0	0	4.59E-06	0	203E-05	0
	Eutrophication terrestrial [Mole of N eq.]	2.43E-02	9.13E-04	7.59E-05	0	0	0	0	0	0	0	0	5.12E-05	0	223E-04	0
	Photochemical ozone formation - human health [kg NMVOC eq.]	9.16E-03	3.41E-04	2.86E-05	0	0	0	0	0	0	0	0	1.97E-05	0	6.16E-05	0
	Resource use, mineral and metals [kg Sb eq.]	1.75E-05	2.40E-07	5.43E-08	0	0	0	0	0	0	0	0	2.89E-08	0	2.40E-10	0
	Resource use, energy carriers [MJ]	5.03E+01	1.64E+00	1.58E-01	0	0	0	0	0	0	0	0	1.23E-01	0	7.01E-02	0
	Water deprivation potential [m ³ world equiv.]	1.52E+00	5.59E-03	4.59E-03	0	0	0	0	0	0	0	0	3.76E-04	0	1.75E-04	0










The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited.

Potential environmental impact – additional mandatory and voluntary indicators

	Product stage	Construction stage		Use stage							End of life stage				Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction /	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
<u>GWP-GHG¹</u> [kg CO2 eq.]	2.24E+00	9.99E-02	7.20E-03	0	0	0	0	0	0	0	0	8.07E-03	0	5.20E-03	0









¹ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Resources Use



Resources Use indicators		Product stage	Construction stage		Use stage							End of life stage			Reuse, recovery, recycling	
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Use of renewable primary energy (PERE) [MJ]	2.29E+00	2.07E-02	6.98E-03	0	0	0	0	0	0	0	0	1.76E-03	0	1.65E-03	0
	Primary energy resources used as raw materials (PERM) [MJ]	2.52E-02	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Total use of renewable primary energy resources (PERT) [MJ]	2.32E+00	2.07E-02	6.98E-03	0	0	0	0	0	0	0	0	1.76E-03	0	1.65E-03	0
	Use of non-renewable primary energy (PENRE) [MJ]	5.42E+01	1.74E+00	1.70E-01	0	0	0	0	0	0	0	0	1.31E-01	0	7.45E-02	0
	Non-renewable primary energy resources used as raw materials (PENRM) [MJ]	1.52E+00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Total use of non-renewable primary energy resources (PENRT) [MJ]	5.57E+01	1.74E+00	1.70E-01	0	0	0	0	0	0	0	0	1.31E-01	0	7.45E-02	0
	Input of secondary material (SM) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of renewable secondary fuels (RSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of non-renewable secondary fuels (NRSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of net fresh water (FW) [m³]	3.77E-02	1.93E-04	1.14E-04	0	0	0	0	0	0	0	0	1.40E-05	0	8.42E-06	0

*For this study, both the product and its packaging are reported in the indicators "Use of renewable primary energy resources used as raw materials" ("PERM") and "Use of non-renewable primary energy resources used as raw materials" ("PENRM"). PERM and PENRM are reported as negative values were materials are recycled or recovered, but not when landfilled.

Waste Category & Output flows








Waste Category & Output Flows		Product stage	Construction stage		Use stage							End of life stage				Reuse, recovery, recycling
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5	B6 Operational	B7 Operational	C1	C2 Transport	C3 Waste	C4 Disposal	D Reuse, recovery, recycling
	Hazardous waste disposed (HWD) [kg]	1.99E-04	3.93E-06	6.16E-07	0	0	0	0	0	0	0	0	3.22E-07	0	1.50E-07	0
	Non-hazardous waste disposed (NHWD) [kg]	4.35E-01	1.51E-01	1,68E-03	0	0	0	0	0	0	0	0	6.46E-03	0	1.00E+00	0
	Radioactive waste disposed (RWD) [kg]	5.94E-05	1.11E-05	2,27E-07	0	0	0	0	0	0	0	0	8.34E-07	0	4.42E-07	0
	Components for re-use (CRU) [kg]	0	0	1,69E-03	0	0	0	0	0	0	0	0	0	0	0	0
	Materials for Recycling (MFR) [kg]	0	0	3,88E-02	0	0	0	0	0	0	0	0	0	0	0	0
	Material for Energy Recovery (MER) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Exported electrical energy (EEE) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Exported thermal energy (EET) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Information on biogenic carbon content

Biogenic Carbon Content		Product stage
		A1 / A2 / A3
	Biogenic carbon content in product [kg]	0
	Biogenic carbon content in packaging [kg]	2.51E-03

Note: 1 kg biogenic carbon is equivalent to 44/12 (approx. 3.67) kg CO₂.

Environmental impacts - Group 2. MARISEAL® 281W and MARISEAL® 282W

	Environmental indicators	Product stage	Construction stage		Use stage							End of life stage			Reuse, Recovery Recycling	
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction /	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Climate Change [kg CO ₂ eq.]	1.76E+00	1.01E-01	5.55E-03	0	0	0	0	0	0	0	0	8.15E-03	0	5.35E-03	0
	Climate Change (fossil) [kg CO ₂ eq.]	1.79E+00	1.01E-01	5.65E-03	0	0	0	0	0	0	0	0	8.14E-03	0	5.27E-03	0
	Climate Change (biogenic) [kg CO ₂ eq.]	-4.13E-02	1.05E-04	-1.24E-04	0	0	0	0	0	0	0	0	7.42E-06	0	7.97E-05	0
	Climate Change (land use change) [kg CO ₂ eq.]	7.77E-03	3.84E-05	2.34E-05	0	0	0	0	0	0	0	0	3.26E-06	0	1.91E-06	0
	Ozone depletion [kg CFC-11 eq.]	6.37E-07	2.51E-08	1.98E-09	0	0	0	0	0	0	0	0	1.89E-09	0	9.36E-10	0
	Acidification terrestrial and freshwater [Mole of H ⁺ eq.]	9.46E-03	3.67E-04	2.92E-05	0	0	0	0	0	0	0	0	2.31E-05	0	4.91E-05	0
	Eutrophication freshwater [kg P eq.]	5.21E-05	714E-07	1.58E-07	0	0	0	0	0	0	0	0	5.81E-08	0	6.33E-08	0
	Eutrophication marine [kg N eq.]	1.42E-03	8.21E-05	4.42E-06	0	0	0	0	0	0	0	0	4.59E-06	0	2.03E-05	0
	Eutrophication terrestrial [Mole of N eq.]	1.47E-02	9.13E-04	4.59E-05	0	0	0	0	0	0	0	0	5.12E-05	0	2.23E-04	0
	Photochemical ozone formation - human health [kg NMVOC eq.]	5.72E-03	3.41E-04	1.78E-05	0	0	0	0	0	0	0	0	1.97E-05	0	6.16E-05	0
	Resource use, mineral and metals [kg Sb eq.]	1.68E-05	2.40E-07	5.13E-08	0	0	0	0	0	0	0	0	2.89E-08	0	2.40E-10	0
	Resource use, energy carriers [MJ]	3.61E+01	1.64E+00	1.13E-01	0	0	0	0	0	0	0	0	1.23E-01	0	7.01E-02	0
	Water deprivation potential [m ³ world equiv.]	1.03E+00	5.59E-03	3.12E-03	0	0	0	0	0	0	0	0	3.76E-04	0	1.75E-04	0

The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited.











Potential environmental impact – additional mandatory and voluntary indicators

	Product stage	Construction stage		Use stage							End of life stage			Reuse, recovery, recycling	
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
<u>GWP-GHG²</u> [kg CO2 eq.]	1.73E+00	9.99E-02	5.48E-03	0	0	0	0	0	0	0	0	8.07E-03	0	5.20E-03	0

Resources Use









Product stage	Construction stage	Use stage	End of life stage	Reuse, recovery, recycling
---------------	--------------------	-----------	-------------------	----------------------------

² The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.



Resources Use indicators		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use							C1 Deconstruction / demolition	C2 Transport			C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
					B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use								
	Use of renewable primary energy (PERE) [MJ]	2.04E+00	2.07E-02	6.17E-03	0	0	0	0	0	0	0	0	1.76E-03	0	1.65E-03	0		
	Primary energy resources used as raw materials (PERM) [MJ]	3.24E-02	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Total use of renewable primary energy resources (PERT) [MJ]	2.07E+00	2.07E-02	6.17E-03	0	0	0	0	0	0	0	0	1.76E-03	0	1.65E-03	0		
	Use of non-renewable primary energy (PENRE) [MJ]	3.88E+01	1.74E+00	1.21E-01	0	0	0	0	0	0	0	0	1.31E-01	0	7.45E-02	0		
	Non-renewable primary energy resources used as raw materials (PENRM) [MJ]	1.94E+00	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Total use of non-renewable primary energy resources (PENRT) [MJ]	4.08E+01	1.74E+00	1.21E-01	0	0	0	0	0	0	0	0	1.31E-01	0	7.45E-02	0		
	Input of secondary material (SM) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Use of renewable secondary fuels (RSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Use of non-renewable secondary fuels (NRSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Use of net fresh water (FW) [m³]	2.59E-02	1.93E-04	7.81E-05	0	0	0	0	0	0	0	0	1.40E-05	0	8.42E-06	0		

*For this study, both the product and its packaging are reported in the indicators "Use of renewable primary energy resources used as raw materials" ("PERM") and "Use of non-renewable primary energy resources used as raw materials" ("PENRM"). PERM and PENRM are reported as negative values are materials are recycled or recovered, but not when landfilled.

Waste Category & Output flows







Waste Category & Output Flows		Product stage	Construction stage		Use stage							End of life stage				Reuse, recovery, recycling
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational decommissioning	B7 Operational dismantling	C1 Decommissioning	C2 Transport	C3 Waste management	C4 Disposal	D Reuse, recovery, recycling
	Hazardous waste disposed (HWD) [kg]	2.44E-05	3.93E-06	8.42E-08	0	0	0	0	0	0	0	0	3.22E-07	0	1.50E-07	0
	Non-hazardous waste disposed (NHWD) [kg]	4.31E-01	1.51E-01	1.51E-03	0	0	0	0	0	0	0	0	6.46E-03	0	1.00E+00	0
	Radioactive waste disposed (RWD) [kg]	5.31E-05	1.11E-05	1.88E-07	0	0	0	0	0	0	0	0	8.34E-07	0	4.42E-07	0
	Components for re-use (CRU) [kg]	0	0	1.69E-03	0	0	0	0	0	0	0	0	0	0	0	0
	Materials for Recycling (MFR) [kg]	0	0	3.88E-02	0	0	0	0	0	0	0	0	0	0	0	0
	Material for Energy Recovery (MER) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Exported electrical energy (EEE) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Exported thermal energy (EET) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Information on biogenic carbon content

		Product stage
Biogenic Carbon Content		A1 / A2 / A3
	Biogenic carbon content in product [kg]	0
	Biogenic carbon content in packaging [kg]	3.22E-03

Note: 1 kg biogenic carbon is equivalent to 44/12 (approx. 3.67) kg CO₂.

Environmental impacts - Group 3. MARISEAL® 400W

	Environmental indicators	Product stage	Construction stage		Use stage							End of life stage			Reuse, Recovery Recycling	
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Climate Change [kg CO ₂ eq.]	3.25E+00	1.01E-01	1.01E-02	0	0	0	0	0	0	0	0	8.15E-03	0	5.35E-03	0
	Climate Change (fossil) [kg CO ₂ eq.]	3.29E+00	1.01E-01	1.02E-02	0	0	0	0	0	0	0	0	8.14E-03	0	5.27E-03	0
	Climate Change (biogenic) [kg CO ₂ eq.]	-6.61E-02	1.05E-04	-1.98E-04	0	0	0	0	0	0	0	0	7.42E-06	0	7.97E-05	0
	Climate Change (land use change) [kg CO ₂ eq.]	2.47E-02	3.84E-05	7.43E-05	0	0	0	0	0	0	0	0	3.26E-06	0	1.91E-06	0
	Ozone depletion [kg CFC-11 eq.]	2.91E-06	2.51E-08	8.81E-09	0	0	0	0	0	0	0	0	1.89E-09	0	9.36E-10	0
	Acidification terrestrial and freshwater [Mole of H+ eq.]	2.26E-02	3.67E-04	6.89E-05	0	0	0	0	0	0	0	0	2.31E-05	0	4.91E-05	0
	Eutrophication freshwater [kg P eq.]	1.32E-04	7.14E-07	3.99E-07	0	0	0	0	0	0	0	0	5.81E-08	0	6.33E-08	0
	Eutrophication marine [kg N eq.]	4.22E-03	8.21E-05	1.29E-05	0	0	0	0	0	0	0	0	4.59E-06	0	2.03E-05	0
	Eutrophication terrestrial [Mole of N eq.]	3.73E-02	9.13E-04	1.14E-04	0	0	0	0	0	0	0	0	5.12E-05	0	2.23E-04	0
	Photochemical ozone formation - human health [kg NMVOC eq.]	1.23E-02	3.41E-04	3.78E-05	0	0	0	0	0	0	0	0	1.97E-05	0	6.16E-05	0
	Resource use, mineral and metals [kg Sb eq.]	3.55E-05	2.40E-07	1.08E-07	0	0	0	0	0	0	0	0	2.89E-08	0	2.40E-10	0
	Resource use, energy carriers [MJ]	4.83E+01	1.64E+00	1.50E-01	0	0	0	0	0	0	0	0	1.23E-01	0	7.01E-02	0
	Water deprivation potential [m ³ world equiv.]	2.60E+00	5.59E-03	7.81E-03	0	0	0	0	0	0	0	0	3.76E-04	0	1.75E-04	0

The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited.

Potential environmental impact – additional mandatory and voluntary indicators

	Product stage	Construction stage		Use stage							End of life stage			Reuse, recovery, recycling	
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
<u>GWP-GHG³</u> [kg CO2 eq.]	3,18E+00	9,99E-02	9,91E-03	0	0	0	0	0	0	0	0	8,07E-03	0	5,20E-03	0









³ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Resources Use



Resources Use indicators		Product stage	Construction stage		Use stage							End of life stage			Reuse, recovery, recycling	
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction /	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Use of renewable primary energy (PERE) [MJ]	4.29E+00	2.07E-02	1.29E-02	0	0	0	0	0	0	0	0	1.76E-03	0	1.65E-03	0
	Primary energy resources used as raw materials (PERM) [MJ]	2.83E-02	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Total use of renewable primary energy resources (PERT) [MJ]	4.32E+00	2.07E-02	1.29E-02	0	0	0	0	0	0	0	0	1.76E-03	0	1.65E-03	0
	Use of non-renewable primary energy (PENRE) [MJ]	5.19E+01	1.74E+00	1.61E-01	0	0	0	0	0	0	0	0	1.31E-01	0	7.45E-02	0
	Non-renewable primary energy resources used as raw materials (PENRM) [MJ]	2.18E+00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Total use of non-renewable primary energy resources (PENRT) [MJ]	5.41E+01	1.74E+00	1.61E-01	0	0	0	0	0	0	0	0	1.31E-01	0	7.45E-02	0
	Input of secondary material (SM) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of renewable secondary fuels (RSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of non-renewable secondary fuels (NRSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of net fresh water (FW) [m³]	6.29E-02	1.93E-04	1.89E-04	0	0	0	0	0	0	0	0	1.40E-05	0	8.42E-06	0

*For this study, both the product and its packaging are reported in the indicators "Use of renewable primary energy resources used as raw materials" ("PERM") and "Use of non-renewable primary energy resources used as raw materials" ("PENRM"). PERM and PENRM are reported as negative values when materials are recycled or recovered, but not when landfilled.

Waste Category & Output flows

Waste Category & Output Flows		Product stage	Construction stage		Use stage							End of life stage			Reuse, recovery, recycling	
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational	B7 Operational	C1 Deconstruction / Demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Hazardous waste disposed (HWD) [kg]	4.61E-05	3.93E-06	1.52E-07	0	0	0	0	0	0	0	0	3.22E-07	0	1.50E-07	0
	Non-hazardous waste disposed (NHWD) [kg]	9.28E-01	1.51E-01	3.07E-03	0	0	0	0	0	0	0	0	6.46E-03	0	1.00E+00	0
	Radioactive waste disposed (RWD) [kg]	8.77E-05	1.11E-05	3.00E-07	0	0	0	0	0	0	0	0	8.34E-07	0	4.42E-07	0
	Components for re-use (CRU) [kg]	0	0	1.69E-03	0	0	0	0	0	0	0	0	0	0	0	0
	Materials for Recycling (MFR) [kg]	0	0	3.88E-02	0	0	0	0	0	0	0	0	0	0	0	0
	Material for Energy Recovery (MER) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Exported electrical energy (EEE) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Exported thermal energy (EET) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Information on biogenic carbon content

Biogenic Carbon Content		Product stage
		A1 / A2 / A3
	Biogenic carbon content in product [kg]	0
	Biogenic carbon content in packaging [kg]	2.82E-03

Note: 1 kg biogenic carbon is equivalent to 44/12 (approx. 3.67) kg CO₂.

Environmental impacts - Group 4. MARISEAL® 710W

Environmental indicators		Product stage	Construction stage		Use stage							End of life stage			Reuse, Recovery Recycling	
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Climate Change [kg CO ₂ eq.]	1.46E+00	1.01E-01	4.78E-03	0	0	0	0	0	0	0	0	8.15E-03	0	5.35E-03	0
	Climate Change (fossil) [kg CO ₂ eq.]	1.50E+00	1.01E-01	4.91E-03	0	0	0	0	0	0	0	0	8.14E-03	0	5.27E-03	0
	Climate Change (biogenic) [kg CO ₂ eq.]	-4.69E-02	1.05E-04	-1.40E-04	0	0	0	0	0	0	0	0	7.42E-06	0	7.97E-05	0
	Climate Change (land use change) [kg CO ₂ eq.]	4.46E-03	3.84E-05	1.35E-05	0	0	0	0	0	0	0	0	3.26E-06	0	1.91E-06	0
	Ozone depletion [kg CFC-11 eq.]	7.89E-07	2.51E-08	2.46E-09	0	0	0	0	0	0	0	0	1.89E-09	0	9.36E-10	0
	Acidification terrestrial and freshwater [Mole of H ⁺ eq.]	6.24E-03	3.67E-04	1.99E-05	0	0	0	0	0	0	0	0	2.31E-05	0	4.91E-05	0
	Eutrophication freshwater [kg P eq.]	4.27E-05	7.14E-07	1.31E-07	0	0	0	0	0	0	0	0	5.81E-08	0	6.33E-08	0
	Eutrophication marine [kg N eq.]	1.17E-03	8.21E-05	3.72E-06	0	0	0	0	0	0	0	0	4.59E-06	0	2.03E-05	0
	Eutrophication terrestrial [Mole of N eq.]	1.18E-02	9.13E-04	3.79E-05	0	0	0	0	0	0	0	0	5.12E-05	0	2.23E-04	0
	Photochemical ozone formation - human health [kg NMVOC eq.]	4.96E-03	3.41E-04	1.58E-05	0	0	0	0	0	0	0	0	1.97E-05	0	6.16E-05	0
	Resource use, mineral and metals [kg Sb eq.]	2.09E-05	2.40E-07	6.41E-08	0	0	0	0	0	0	0	0	2.89E-08	0	2.40E-10	0
	Resource use, energy carriers [MJ]	3.47E+01	1.64E+00	1.10E-01	0	0	0	0	0	0	0	0	1.23E-01	0	7.01E-02	0
	Water deprivation potential [m ³ world equiv.]	6.64E-01	5.59E-03	2.01E-03	0	0	0	0	0	0	0	0	3.76E-04	0	1.75E-04	0











The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited.

Potential environmental impact – additional mandatory and voluntary indicators

	Product stage	Construction stage		Use stage							End of life stage			Reuse, recovery, recycling	
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
<u>GWP-GHG⁴</u> [kg CO2 eq.]	1.45E+00	9.99E-02	4.74E-03	0	0	0	0	0	0	0	0	8.07E-03	0	5.20E-03	0









⁴ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Resources Use



Resources Use indicators		Product stage	Construction stage		Use stage							End of life stage			Reuse, recovery, recycling	
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Use of renewable primary energy (PERE) [MJ]	1.69E+00	2.07E-02	5.14E-03	0	0	0	0	0	0	0	0	1.76E-03	0	1.65E-03	0
	Primary energy resources used as raw materials (PERM) [MJ]	5.17E-02	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Total use of renewable primary energy resources (PERT) [MJ]	1.74E+00	2.07E-02	5.14E-03	0	0	0	0	0	0	0	0	1.76E-03	0	1.65E-03	0
	Use of non-renewable primary energy (PENRE) [MJ]	3.73E+01	1.74E+00	1.18E-01	0	0	0	0	0	0	0	0	1.31E-01	0	7.45E-02	0
	Non-renewable primary energy resources used as raw materials (PENRM) [MJ]	1.55E+00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Total use of non-renewable primary energy resources (PENRT) [MJ]	3.89E+01	1.74E+00	1.18E-01	0	0	0	0	0	0	0	0	1.31E-01	0	7.45E-02	0
	Input of secondary material (SM) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of renewable secondary fuels (RSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of non-renewable secondary fuels (NRSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of net fresh water (FW) [m ³]	1.66E-02	1.93E-04	5.05E-05	0	0	0	0	0	0	0	0	1.40E-05	0	8.42E-06	0

*For this study, both the product and its packaging are reported in the indicators "Use of renewable primary energy resources used as raw materials" ("PERM") and "Use of non-renewable primary energy resources used as raw materials" ("PENRM"). PERM and PENRM are reported as negative values when materials are recycled or recovered, but not when landfilled.

Waste Category & Output flows








Waste Category & Output Flows		Product stage	Construction stage		Use stage							End of life stage				Reuse, recovery, recycling
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Decommission	B5 Refurbishment	B6 Operational	B7 Operational	C1 Decommission	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Hazardous waste disposed (HWD) [kg]	1.73E-05	3.93E-06	6.78E-08	0	0	0	0	0	0	0	0	3.22E-07	0	1.50E-07	0
	Non-hazardous waste disposed (NHWD) [kg]	2.24E-01	1.51E-01	9.89E-04	0	0	0	0	0	0	0	0	6.46E-03	0	1.00E+00	0
	Radioactive waste disposed (RWD) [kg]	3.63E-05	1.11E-05	1.50E-07	0	0	0	0	0	0	0	0	8.34E-07	0	4.42E-07	0
	Components for re-use (CRU) [kg]	0	0	1.69E-03	0	0	0	0	0	0	0	0	0	0	0	0
	Materials for Recycling (MFR) [kg]	0	0	3.88E-02	0	0	0	0	0	0	0	0	0	0	0	0
	Material for Energy Recovery (MER) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Exported electrical energy (EEE) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Exported thermal energy (EET) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Information on biogenic carbon content

		Product stage
Biogenic Carbon Content		A1 / A2 / A3
	Biogenic carbon content in product [kg]	0
	Biogenic carbon content in packaging [kg]	5.15E-03

Note: 1 kg biogenic carbon is equivalent to 44/12 (approx. 3.67) kg CO₂.

Environmental impacts - Group 5. MARISEAL® 800 Plus

		Product stage	Construction stage		Use stage							End of life stage			Reuse, Recovery Recycling	
Environmental indicators		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / ...	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Climate Change [kg CO ₂ eq.]	8.22E-01	1.01E-01	3.39E-03	0	0	0	0	0	0	0	0	8.15E-03	0	5.35E-03	0
	Climate Change (fossil) [kg CO ₂ eq.]	8.65E-01	1.01E-01	3.51E-03	0	0	0	0	0	0	0	0	8.14E-03	0	5.27E-03	0
	Climate Change (biogenic) [kg CO ₂ eq.]	-4.40E-02	1.05E-04	-1.31E-04	0	0	0	0	0	0	0	0	7.42E-06	0	7.97E-05	0
	Climate Change (land use change) [kg CO ₂ eq.]	6.66E-04	3.84E-05	2.37E-06	0	0	0	0	0	0	0	0	3.26E-06	0	1.91E-06	0
	Ozone depletion [kg CFC-11 eq.]	1.91E-06	2.51E-08	5.96E-09	0	0	0	0	0	0	0	0	1.89E-09	0	9.36E-10	0
	Acidification terrestrial and freshwater [Mole of H ⁺ eq.]	4.08E-03	3.67E-04	1.49E-05	0	0	0	0	0	0	0	0	2.31E-05	0	4.91E-05	0
	Eutrophication freshwater [kg P eq.]	3.14E-05	7.14E-07	1.01E-07	0	0	0	0	0	0	0	0	5.81E-08	0	6.33E-08	0
	Eutrophication marine [kg N eq.]	7.10E-04	8.21E-05	2.65E-06	0	0	0	0	0	0	0	0	4.59E-06	0	2.03E-05	0
	Eutrophication terrestrial [Mole of N eq.]	7.80E-03	9.13E-04	2.92E-05	0	0	0	0	0	0	0	0	5.12E-05	0	2.23E-04	0
	Photochemical ozone formation - human health [kg NMVOC eq.]	2.70E-03	3.41E-04	1.03E-05	0	0	0	0	0	0	0	0	1.97E-05	0	6.16E-05	0
	Resource use, mineral and metals [kg Sb eq.]	8.21E-06	2.40E-07	2.79E-08	0	0	0	0	0	0	0	0	2.89E-08	0	2.40E-10	0
	Resource use, energy carriers [MJ]	1.68E+01	1.64E+00	6.44E-02	0	0	0	0	0	0	0	0	1.23E-01	0	7.01E-02	0
	Water deprivation potential [m ³ world equiv.]	9.12E-01	5.59E-03	2.78E-03	0	0	0	0	0	0	0	0	3.76E-04	0	1.75E-04	0











The results of this environmental impact indicator should be used with caution, as the uncertainties of the results are high and experience with this parameter is limited.

Potential environmental impact – additional mandatory and voluntary indicators

	Product stage	Construction stage		Use stage							End of life stage			Reuse, recovery, recycling	
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
<u>GWP-GHG⁵</u> [kg CO2 eq.]	8.41E-01	9.99E-02	3.43E-03	0	0	0	0	0	0	0	0	8.07E-03	0	5.20E-03	0









⁵ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Resources Use



Resources Use indicators		Product stage	Construction stage		Use stage							End of life stage			Reuse, recovery, recycling	
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Use of renewable primary energy (PERE) [MJ]	2.05E+00	2.07E-02	6.34E-03	0	0	0	0	0	0	0	0	1.76E-03	0	1.65E-03	0
	Primary energy resources used as raw materials (PERM) [MJ]	3.44E-02	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Total use of renewable primary energy resources (PERT) [MJ]	2.08E+00	2.07E-02	6.34E-03	0	0	0	0	0	0	0	0	1.76E-03	0	1.65E-03	0
	Use of non-renewable primary energy (PENRE) [MJ]	1.81E+01	1.74E+00	6.92E-02	0	0	0	0	0	0	0	0	1.31E-01	0	7.45E-02	0
	Non-renewable primary energy resources used as raw materials (PENRM) [MJ]	5.11E+00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Total use of non-renewable primary energy resources (PENRT) [MJ]	2.32E+01	1.74E+00	6.92E-02	0	0	0	0	0	0	0	0	1.31E-01	0	7.45E-02	0
	Input of secondary material (SM) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of renewable secondary fuels (RSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of non-renewable secondary fuels (NRSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Use of net fresh water (FW) [m³]	2.43E-02	1.93E-04	7.45E-05	0	0	0	0	0	0	0	0	1.40E-05	0	8.42E-06	0

*For this study, both the product and its packaging are reported in the indicators "Use of renewable primary energy resources used as raw materials" ("PERM") and "Use of non-renewable primary energy resources used as raw materials" ("PENRM"). PERM and PENRM are reported as negative values when materials are recycled or recovered, but not when landfilled.

Waste Category & Output flows

Waste Category & Output Flows		Product stage	Construction stage		Use stage							End of life stage			Reuse, recovery, recycling	
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational	B7 Operational	C1 Deconstruction	C2 Transport	C3 Waste	C4 Disposal	D Reuse, recovery, recycling
	Hazardous waste disposed (HWD) [kg]	2.03E-05	3.93E-06	9.74E-08	0	0	0	0	0	0	0	0	3.22E-07	0	1.50E-07	0
	Non-hazardous waste disposed (NHWD) [kg]	1.13E-01	1.51E-01	1.07E-03	0	0	0	0	0	0	0	0	6.46E-03	0	1.00E+00	0
	Radioactive waste disposed (RWD) [kg]	3.03E-05	1.11E-05	1.85E-07	0	0	0	0	0	0	0	0	8.34E-07	0	4.42E-07	0
	Components for re-use (CRU) [kg]	0	0	1.69E-03	0	0	0	0	0	0	0	0	0	0	0	0
	Materials for Recycling (MFR) [kg]	0	0	3.88E-02	0	0	0	0	0	0	0	0	0	0	0	0
	Material for Energy Recovery (MER) [kg]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Exported electrical energy (EEE) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Exported thermal energy (EET) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Information on biogenic carbon content

Biogenic Carbon Content		Product stage
		A1 / A2 / A3
	Biogenic carbon content in product [kg]	0
	Biogenic carbon content in packaging [kg]	3.43E-03

Note: 1 kg biogenic carbon is equivalent to 44/12 (approx. 3.67) kg CO₂.

LCA results interpretation

The following figure refers to a functional unit of 1 kg of product, expected to have average service life between 10 and 25 years (depending on product).



[1] This indicator corresponds to the abiotic depletion potential of fossil resources.
 [2] This indicator corresponds to the total use of primary energy.
 [3] This indicator corresponds to the use of net fresh water.
 [4] This indicator corresponds to the sum of hazardous, non-hazardous and radioactive waste disposed.

The impact results follow a similar trend for all product groups.

Global Warming Potential (Climate Change) (GWP)

For GWP, the majority of contribution to this environmental impact is from the production modules (A1 – A3). This is primarily because the sources of greenhouse gas emissions are predominant in this part of the life cycle. CO₂ is generated upstream from the production of raw materials and electricity and is also released on site by the combustion of coke, diesel and natural gas. We can see that other sections of the life cycle also contribute to the GWP. However, the production modules contribute to over 94% to the impact. Impacts from A4 (transport to clients), waste disposal transportation in A5 (disposal after installation) and C (transport and disposal at the end of life) are much lower than A1-A3.

Non-renewable resources consumptions

The consumption of non-renewable resources has the highest value in the production modules, with a contribution to the impact higher than 95 % due to the consumption of diesel within the factory.

The contribution to this impact of the other modules is very small and is mainly due to the non-renewable resources consumed during the transport of the product to the installation place.

Energy Consumptions

Modules A1-A3 with a contribution to the impact around 96 % have the highest contribution to the total energy consumption. Energy is consumed in the form of electricity, and diesel during the manufacturing of the Product.

Water Consumption

Water is used within the manufacturing facility and therefore we see that almost all the impact comes from the production phase.


Waste Production

The largest contributor is the end of life module with a contribution to the impact around 64 %. This is because the 100 % of the product is assumed to be sent to landfill once it reaches the end of life state.

Additional information

Electricity description

TYPE OF INFORMATION	DESCRIPTION
Location	Greece
Production mix	Renewable Biomass - 1.44 % Renewable Solar - 9.07 % Renewable Geothermal - 0.15 % Renewable wind - 8.35 % Renewable hydro - 4.69 % Nuclear - 3.45 % Fossil unspecified - 0.60 % Fossil hard coal - 5.62 % Fossil Oil - 7.74 % Fossil lignite - 10.17 % Fossil gas - 48.73 %
Reference year	2021
Type of data set	Cradle to gate from Ecoinvent 3.8 database
Source	European Residual Mixes 2021
CO ₂ emissions	444.63 (g /kWh)

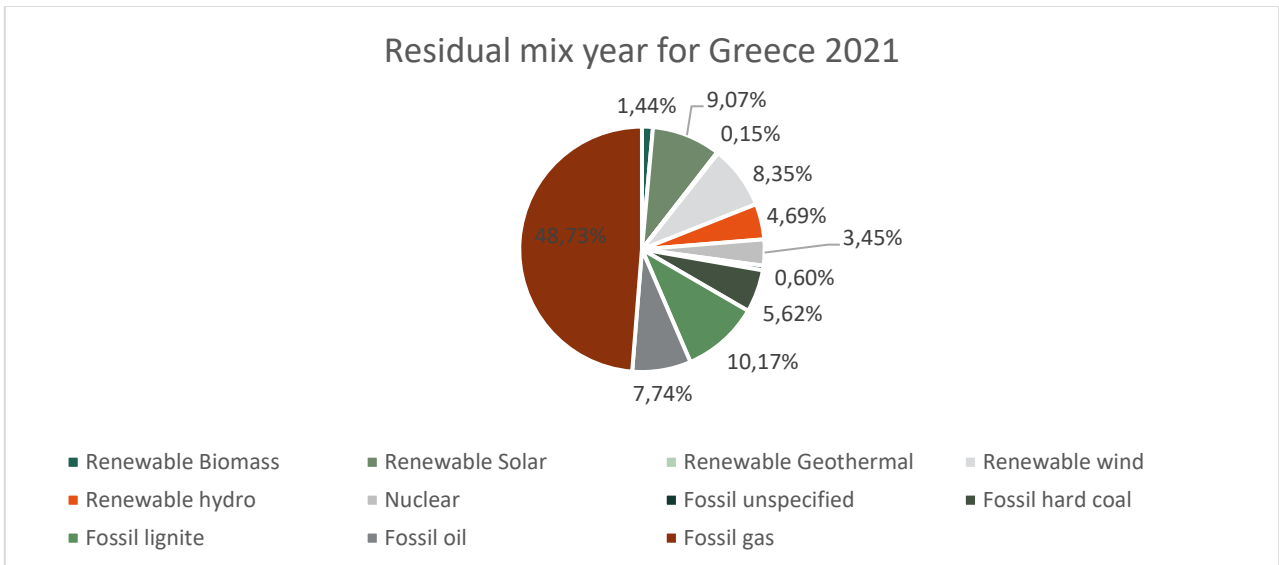

Global warming potential for market application

Based on technical product properties all environmental impact indicators may be quantified for usual market product applications. The following results present the GWP indicator for a typical application of MARIS Water-based products MARISEAL® 250W, MARISEAL® 270W, MARISEAL® 280W, MARISEAL® 281W, MARISEAL® 282W, MARISEAL® 400W, MARISEAL® 710W, MARISEAL® AQUA PRIMER and MARISEAL® 800 PLUS on surfaces.

Parameter	Unit				C4	Total
	A1 + A2 + A3	A4	A5	C2		
Density min	8,000	8,000	8,000	8,000	1,00E+00	8.40E-01
Density max	1,470	1,480	1,480	1,450	1,50E+00	1.49E+00
Average application weight	1,520	1,520	1,520	1,520	1,52E+00	1,52E+00
Application weight	1,000	1,000	1,000	1,000	1,00E-01	1,00E-01

t m i n	A p p l i c a t i o n w e i g h t m a x	2	2	2	2		
		8	8	8	8		
		0	0	0	0		
		E	E	E	E		
		+000	+000	+000	+000	2,80E+00	2.80E+01
G W P - t o t a l	k g C O ₂ e q · / k g	2	1	6	8		
		0	0	5	1		
		5	1	7	5		
		E	E	E	E		
		+000	-001	-003	-003	1.75E+00	3.92E+00
G W P - a v e r a g e	k g C O ₂ e q · / m ²	3	1	1	1		
		1	5	0	2		
		3	4	0	4		
		E	E	E	E		
		+000	-001	-002	-002	2.67E+00	5.98E+00
G W P - m i n	k g C O ₂ e q · / m ²	2	1	6	8		
		0	0	5	1		
		5	1	7	5		
		E	E	E	E		
		-001	-002	-004	-004	1.75E-01	3.92E-01
G W P - m a x	k g C O ₂ e q · / m ²	5	2	1	2		
		7	8	8	2		
		5	3	4	8		
		E	E	E	E		
		+000	-001	-002	-002	4.91E+00	1,10E+01

Data quality

Inventory data quality is judged by geographical, temporal, and technological representativeness. To cover these requirements and to ensure reliable results, first-hand industry data crossed with LCA background datasets were used. The data was collected from internal reports and reporting documents from Maris Saint-Gobain. After evaluating the inventory, according to the defined ranking in the LCA report, the assessment reflects good inventory data quality.

Information related to sector EPDs

Individual EPD.

Differences versus previous versions of the EPD

This is the first version of this EPD.

References

1. EPD International (2019) General Programme Instructions for the International EPD® System. Version 3.01, dated 2019-09-18.
2. The International EPD System PCR 2019:14 Construction products, Version 1.11.
3. EN 15804:2012+A2:2019 Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products.
4. ISO 21930:2007 Sustainability in building construction – Environmental declaration of building products.
5. ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and procedures.
6. ISO 14040:2006 Environmental management. Life cycle assessment. Principles and framework.
7. ISO 14044:2006 Environmental management. Life cycle assessment. Requirements and guidelines.
8. LCA report of Maris Saint-Gobain products (2022).



www.environdec.com

