

## DECLARATION OF PERFORMANCE

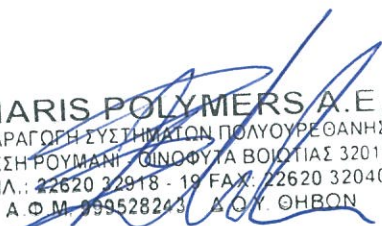
according Annex III of the Regulation (EU) No 305/2011  
 amended by Commissions delegated Regulation (EU) No 574/2014 No PU 30

1. Unique identification code of the product-type: **MARIFLEX PU 30**
2. Intended use: **SEALANT FOR FACADE ELEMENTS : EN-15651-1: F-EXT-INT-CC**
3. Manufacturer (Distributor): **MARIS POLYMERS S.A.  
 Industrial Area of Inofita  
 GR-32011 Inofita  
 Greece**
4. Authorised representative: **Not relevant**
5. System of assessment and verification of constancy of performance: **System 3, System 3 for reaction to fire  
 Reaction to fire test (Notified Body 370)  
 Notified Body (1292)**
6. Harmonised standard: **EN 15651-1**
7. Declared performances:

Essential characteristics	Performance	Harmonized technical specification
Reaction to fire	E	EN 15651-1
Resistance to flow	≤3 mm	
Loss of Volume	≤10%	
Tensile Properties after immersion in water	No Failure	
Tensile Properties	≤0,4	
Tensile properties for nonstructural sealants used in cold climates (-30 °C)	≤0,9	
Tensile Properties at maintained extension (-30°C)	No Failure	
Adhesion/Cohesion at variable temperatures	No Failure	
Durability	Pass	

The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

  
MARIS POLYMERS A.E.  
ΠΑΡΑΓΩΓΗ ΣΥΣΤΗΜΑΤΩΝ ΠΟΛΥΟΥΡΕΘΑΝΗΣ  
ΘΕΣΗ ΡΟΥΜΑΝΙ - ΟΙΝΟΦΥΤΑ ΒΟΙΩΤΙΑΣ 32011  
ΤΗΛ.: 22620 32918 - 19 FAX: 22620 32040  
Α.Φ.Μ. 999528243 Α.Ο.Υ. ΟΗΒΟΝ

Kostas Varelas  
R&D Manager  
MARIS POLYMERS SA